



- Highly accurate portable PIM Analyzer provides two 40 watt carriers (40W x 2), with -125 dBm sensitivity all in a less than 36 pound carry-on size case
- Instantaneous Measurement Modes for PIM and Return Loss, Frequency Sweep and PIM vs Time for the 880-960 MHz band.
- Self-calibrating to industry standards
- Variable output power from 17 to 46 dBm
- High impact, water-resistant compact carrying case, color coded to frequency band, ideal for field environments
- Measures the 3rd, 5th, 7th and 9th reflective passive intermodulation
- Internal and external data storage
- Software and firmware updates downloadable via USB connection
- PiMPro Eco optional lab-based measurement and test automation software
- Universal and Basic 7–16 DIN component Accessory Kits available

Overview

CCI's PiMPro Classic 900 portable precision Passive Intermod (PIM) analyzer has been designed from the ground up to meet the specific challenges of PIM testing both in the field and in the lab. The PiMPro Classic 900 covers 880-960 MHz while delivering maximum power of two carriers at 40 watts (40W x 2) and uncompromising accuracy of intermodulation (IM) measurements, with a sensitivity of -125 dBm(-168 dBc at 20 watts). At less than 36 pounds the PiMPro Classic is rugged and compact in a portable carry-on size, this combined with it's easy to use graphic navigation tools and unique touch screen display make it an invaluable tool for on site PIM testing.

Long-term Evolution (LTE) radios are configured for 40 watts or more output power per carrier. Since site configurations can have as many as four carriers per sector, PIM testing at anything less than 40W x 2 does not accurately simulate live network traffic and is likely to understate actual site PIM levels. PiMPro's 40W x 2 power level allows for more realistic PIM level testing in the field. By design, the PiMPro provides precise measurement of the 3rd, 5th, 7th and 9th order of intermodulation of any system or component under high-power conditions. In addition to passive intermodulation measurements, the unit will provide VSWR and Return Loss values. PiMPro can be used to verify the integrity of individual passive components including connectors, cable assemblies, antennas, filters, making it an integral performance tool for both field and lab technicians.

PiMPro Eco is an optional software application for automating PIM lab-based measurements performed on the PiMPro family of analyzers. The application allows users to create and recall test profiles, simultaneously perform frequency and power sweep, create customized reports for distribution and control ancillary instruments, such as network analyzers, signal analyzers and power meters for related RF measurements. PiMPro Eco software includes the applications source code written in LabVIEW, with a perpetual-use, royalty-free license. PiMPro Eco source code can easily be modified for various lab, field, production and proprietary environments. CCI's turn-key PIM solutions, leverage best-in-class instrumentation partners, RF-centric software expertise and a global support network.



DATA SHEET

PiMPro Portable Analyzer

PiMPro Classic 900

Applications

- On site installation testing of antennas, filters, cable assemblies and other passive components
- Mobile operators can isolate site performance issues and perform interference testing
- Research and development teams can simulate site conditions with PiMPro's high power capability for prototype testing
- Automated Test Equipment (ATE) for passive component and cable manufactures for product testing



SPECIFICATIONS

PiMPro Portable Analyzer

PiMPro Classic 900

Electrical Specifications

PiMPro Classic 900	
Transmitter	Band GSM 900
	Receive Frequency 880 - 915 MHz
	Transmit Frequency 925 - 960 MHz
	Frequency Accuracy < 5 ppm
	Power Accuracy 0.3 dB
	Frequency Step Size 200 kHz
	Power Resolution 0.1 dB
Receiver	Adjustable Power Range 17 to 46 dBm x 2 (50 mW to 40 W x 2)
	Residual Intermod Level -122 dBm (-125 dBm Typical)
	Measurement Sensitivity -135 dBm
	Noise Floor -136 dBm
Measurement Mode	Reverse Power Protection 13 dBm (20 mW) continuous
	Measurement Method One Port, Reverse PIM
	Real Time PIM 3rd, 5th, 7th & 9th PIM
	Return Loss Measured in dB
	PIM vs Time 3rd, 5th, 7th & 9th PIM
	RX Interference Receive Only Mode - Noise Floor Measurements
	Frequency Sweep Frequency Response
	DAS Feature Path Loss Characteristics
System	Power 90 - 256 V, 50 - 60 Hz
	Alarms Audio & Visual Display
	Display Size & Type 7" TFT Color Touch Screen
	Data Ports 1 - USB 2.0, 1 - Ethernet Port
Electrical	Remote Control No WiFi
	Max Power Consumption <500 W

Mechanical

	Weight 36.0 lbs (16.3 kg)
	RF Output Connector 7-16 DIN Female
	Dimensions (WxHxD) 18.7x14.8x7.0 in. (475 x 375.9 x 177.8 mm)
	Operating Temperature -10-45°C, 14-117°F, 95% RH
	Storage Temperature -30-60°C, -22-140°F, 85% RH




SPECIFICATIONS

PiMPro Portable Analyzer

PiMPro Classic 900



PiMPro Classic Case Height Dimension

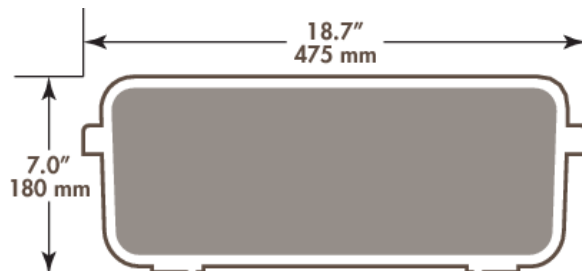

PiMPro Classic Case Width and Depth Dimensions



SPECIFICATIONS

PiMPro Portable Analyzer

PiMPro Classic 900

Measurement & Configuration




System Configuration

System Configuration is the first data entry point for PiMPro users, where all system and report generation parameters are set. Includes settings for Date and Time, Audio Alarm, RF Power on Time interval, central Data Label management, PiMPro registration information and IP address are all keyed in from this screen. Software updates and screen calibrations are also accessed from this screen.




PIM vs Return Loss

PiMPro's main measurement screen provides instantaneous PIM measurement in both dBc or dBm. The large display flashes to annunciate the presence of RF power at the output connector. Pass/Marginal/Fail Limits, Output Power, Frequency and IM settings originate from this screen. PiMPro's unique Return Loss diagnostic feature at high transmit (TX) power, quickly points out open cables.




PIM vs Time

The PIM vs Time dynamic measurement mode features a graphical representation of PIM as a function of time. Time scale can be set from 10 seconds to 4 minutes. The PiMPro Return Loss feature is also available on this screen.




Frequency Sweep

PiMPro displays a swept receive (RX) PIM range by sweeping the TX carriers from end to end within the set frequency band. PIM frequency response is displayed, exposing the worst case PIM level and the contributing frequencies. Users can immediately transfer the graph to the PIM vs Time feature and run a new test to isolate the causes of the specific PIM.



RX Interference

With both internal amplifiers set to off, PiMPro performs a spectral analysis sweep, for interfering signals. RX Interference mode provides the added ability to discern PIM from external interfering signals in the receive band. External and internal PIM signals are unlikely to be in phase or simultaneous within PiMPro's narrow receiver range, therefore, making RX Interference a powerful field diagnostic tool.



Report Generator

Report data for all measurement modes can be stored in either, HTML or PDF file format. Users can concatenate a limitless series of measurements with different sector, feeder, color codes, as one single PDF file. Reports can be saved in PiMPro's internal memory or to external USB memory from the unit's front panel.



PiMPro Eco (Optional)

The PiMPro Eco software application automates PIM lab-based measurements performed on the PiMPro Classic and Rack Mount. Users can create and recall test profiles, simultaneously perform frequency and power sweep, create customized reports for distribution as well as control ancillary instruments, such as network analyzers, signal analyzers and power meters for related RF measurements.



PP-AK-DMDM Low PIM 7–16 DIN Male to Male Adapter

PP-AK-DFDF Low PIM 7–16 DIN Female to Female Adapter

PP-AK-DMNF Low PIM 7–16 DIN Male to N Female Adapter

PP-AK-DMNM Low PIM 7–16 DIN Male to N Male Adapter

PPT-AK-LOAD Low PIM Termination Load < -168 dBc with both Male and Female 7–16 DIN

PP-AK-CAB-DMDF Low PIM Male DIN to Female DIN jumper cable 3/8" 3 m (10 ft) length

PP-AK-CAB-DMDM Low PIM Male DIN to Male DIN jumper cable 3/8" 3 m (10 ft) length

PP-AK-PSTAN PIM Standard Verification Source Tool

PP-AK-TORW Torque Wrench for 7–16 DIN Connector

PP-AK-ADJW Adjustable Wrench

PP-AK-FIXW Small 32 mm Wrench for 7–16 DIN

PPT-AK-ALCH Alcohol Cleaning Kit



ORDERING

PiMPro Portable Analyzer

PiMPro Classic 900

Parts & Accessories

PIMPRO CLASSIC 900	PiMPro Classic 900
PP-ECO	PiMPro Eco Optional Software
PP-AK-CASE-RTC	PiMPro Transport Case
PP-AK-KIT	Universal Accessory Kit



STANDARDS & CERTIFICATIONS

PiMPro Portable Analyzer

PiMPro Classic 900

Certifications

Federal Communication Commission (FCC) Part 15 Class B, CE, CSA US